

Allentown, PA | Mesa, AZ 800.468.1441 info@atas.com | www.atas.com



STOCK COLORS

70% PVDF resin based coatings provide high-performance durability for exterior and interior applications. These coatings are designed to resist fading, chalking, and abrasion. Meets the requirement of AAMA 2605-13 and AAMA 620-02.





A leading manufacturer of sustainable building envelope technology, ATAS utilizes cool pigment paint on many color offerings. Our products reflect infrared radiation, which results in cooler surface temperatures, and maximum fade resistance.

Many of the ATAS products meet the qualifications for potential LEED credits and CRRC ratings. See ATAS website for specific SRI values and certifications.

70% PVDF finish carries a limited warranty against fading and chalking. ATAS coated materials are non-staining and virtually maintenance free. Any surface residue is easily removed with conventional cleaning solutions or detergents.

For complete selection of additional color offerings, visit www.atas.com/COLORS

For current SRI values and agency listings, refer to our Color and Material Reference Guide: www.atas.com/SRI

GALVALUME® is an internationally recognized trademark of BIEC International Inc., and some of its licensed producers. Stainless steel products provided by ROOFINOX®. Colors are as close to the actual colors as modern printing allows. Metal color chips available on request (this is a requirement for all premium colors), and should be used for final color selection. If you have requirements or preference for colors or finishes other than shown, contact ATAS. Color availability varies by material. gauge and profile. ATAS reserves the right to modify, eliminate and/or change its products without prior notification. All colors are produced under stringent guidelines and tolerances that are identified within the coated metal industry. Batch to batch variations may occur within these established industry tolerances. Care should be exercised by customer when mixing lots. Contact ATAS for more information.

LAMINATES*

ATAS International, Inc. offers five laminate patterns: four wood grain and one stacked stone. Our laminates are UV stable for exterior wall applications.





Cherry (81)






Dark Teak (83) Medium Teak (84)

Stacked Stone (85)

OXIDE SERIES*

Made to look like weathered steel with a rust-like appearance, you can combine the aesthetic appeal of aged metal with the advantages of brand new metal cladding with a 70% PVDF finish.






Tarnished Red (47)

NATURAL METALS

Due to their beauty, durability and time-proven performance, natural metals are a preferred material used in architecture. Natural metals will weather and patina naturally over time, adding character and aesthetic appeal to any building design. In addition to natural metals, ATAS offers 55% Al-Zn alloy coated steel with acrylic coating and anodized aluminum as standard available materials.

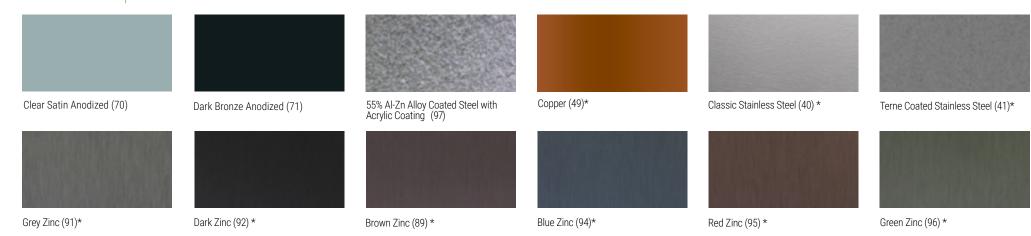

^{*} Special material. Pricing and availability dependent upon project specifics. Color chips available upon request.